

Data sheet

AGM-VRLA Battery



Battery Construction

Component	Positive Plate	Negative Plate	Container & Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

PERFORMANCE DATA

Discharge Constant Current at 25°C (Amperes)

End Voltage (V/cell)	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	81.5	64.7	39.2	24.8	14.6	10.2	8.36	7.14	4.90	4.07	2.14
1.65V	79.0	63.1	38.4	24.4	14.5	10.1	8.31	7.10	4.87	4.06	2.13
1.70V	75.8	60.8	37.2	23.8	14.4	10.1	8.26	7.05	4.83	4.05	2.13
1.75V	72.5	58.7	36.3	23.3	14.2	10.0	8.20	7.00	4.80	4.03	2.11
1.80V	68.4	55.6	35.0	22.6	13.8	9.70	7.95	6.79	4.66	4.00	2.10

Discharge Constant Power at 25°C (Watts)

End Voltage (V/cell)	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	880	710	440	283	169	120	98.4	84.4	58.2	48.6	25.7
1.65V	854	693	431	278	168	119	97.8	83.9	57.8	48.5	25.6
1.70V	818	668	418	271	167	118	97.1	83.3	57.4	48.4	25.5
1.75V	783	645	408	266	164	118	96.4	82.7	57.0	48.1	25.4
1.80V	739	611	393	258	160	114	93.5	80.3	55.3	47.8	25.2


APPLICATIONS

- Uninterruptible Power Supplies (UPS)
- Electric Power Systems (EPS)
- Emergency backup power supplies
- Electronic apparatus and equipment
- Communication power supplies
- DC power supplies
- Auto control system



SPECIFICATIONS

Nominal Voltage		12 V
Number of cells		6
Design Floating Life (20°C)		12 years
Dimensions	Length	197 mm
	Width	165 mm
	Height	170 mm
	Total Height	170 mm
Weight		13.5 kg
Nominal Capacity (25°C)	20 hours rate (1.80)	42.0 Ah
	10 hours rate (1.80)	40.0 Ah
	5 hours rate (1.75)	35.0 Ah
	1 hour rate (1.70)	23.8 Ah
Internal Resistance (fully charged, 25°C)		8.5 mOhm
Self Discharge		approx. 3% per month at 25°C
Nominal Operating Temperature		25°C
Operating Temperature range	Discharge	-15°C to 50°C
	Charge	-10°C to 50°C
	Storage	-20°C to 50°C
Float Charging Voltage		2.25 to 2.30 V/cell at 25°C
Temperature compensation		-18mV/°C
Boost Charging Voltage		2.40 to 2.45 V/cell at 25°C
Temperature compensation		-30mV/°C
Maximum charging current		12.0 A
Maximum discharge current (25°C)		400 A (5 sec.)
Short Circuit Current (25°C)		1400 A

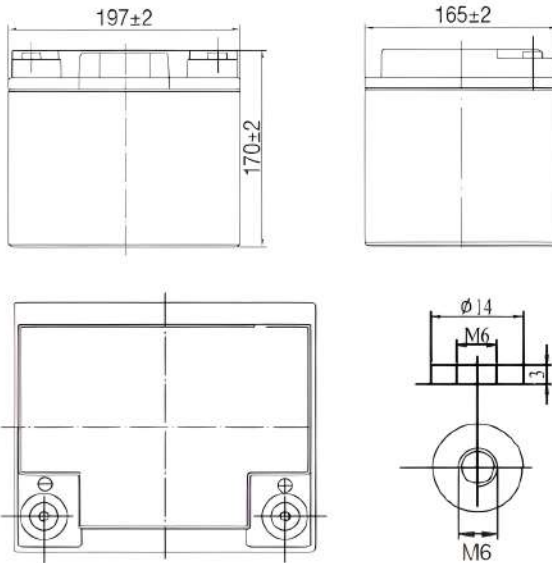


WELLSAN DIŞ TİCARET LIMITED ŞİRKETİ.


Zafer Mah. Babaocağı SK. No: 2-4 iç Kapi No: 50 bahçelievler 34180 / İSTANBUL TÜRKİYE .

www.wellsan-ups.com.tr sales@wellsan.com.tr


Cycle Service Life in Relation to Depth of Discharge

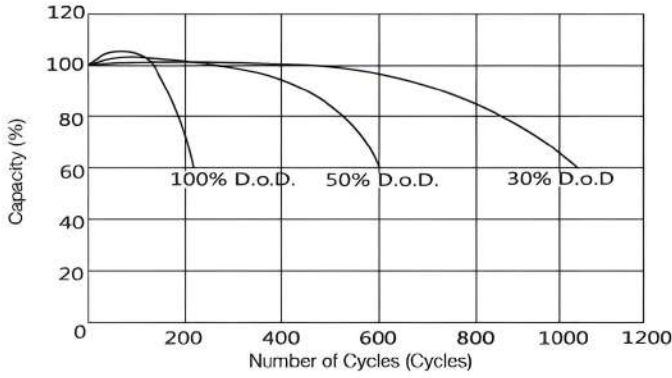


Relationship Between OCV and Residual Capacity (25°C)

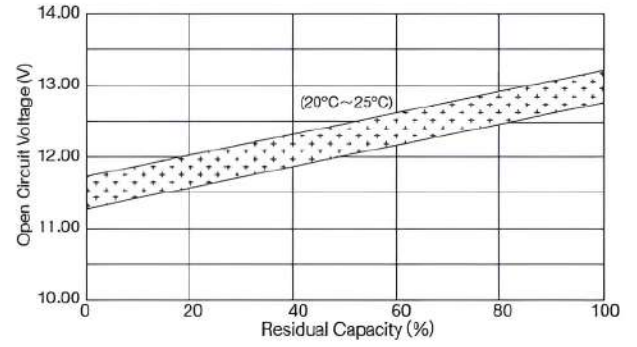


Temperature Effects on Capacity

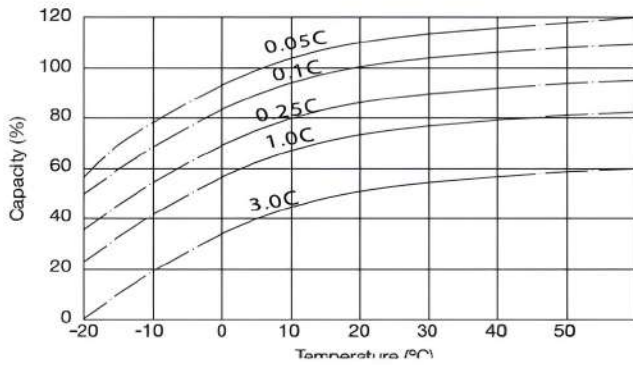


Relationship Between Charging Voltage and Temperature

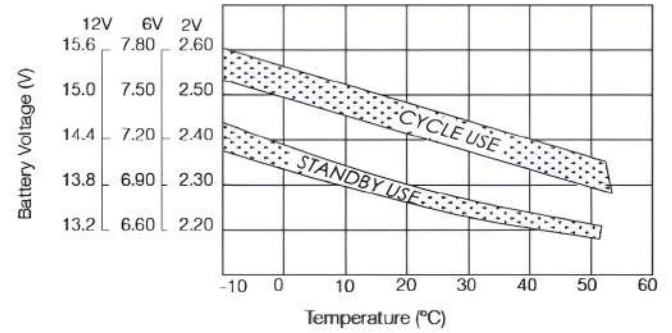


Self Discharge Characteristics

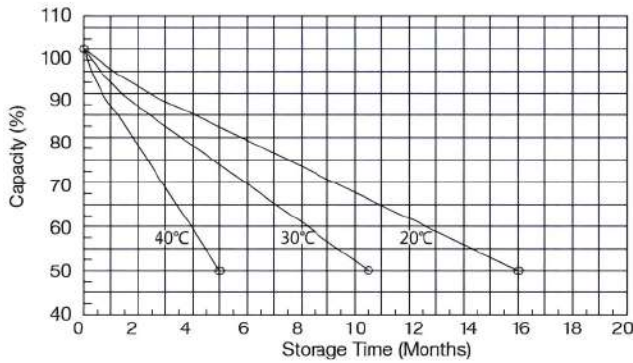

Temperature Effects on Float Life

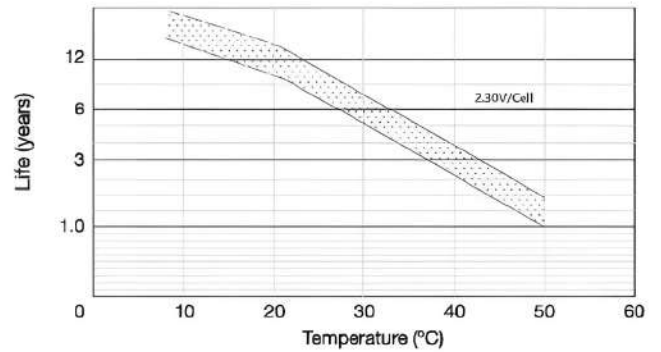

Charging Characteristics (25°C)

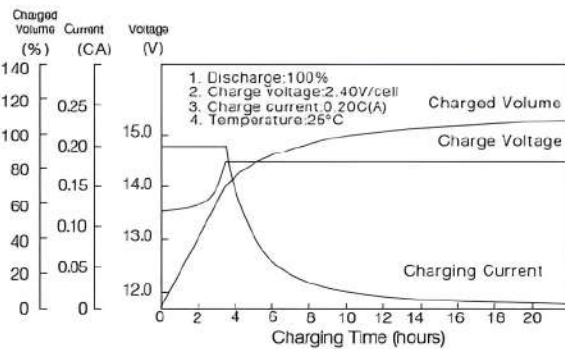

Discharge Characteristics (25°C)

